
+1 505 891 8356 SALES@SUBMATERIAL.COM

DIVVY | BASIS

Screen

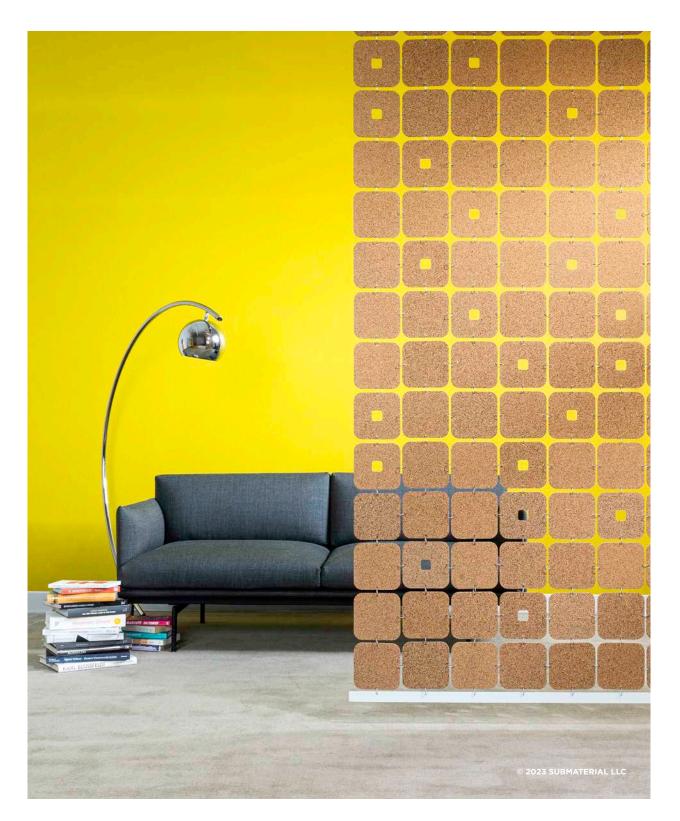

+1 505 891 8356 SALES@SUBMATERIAL.COM


DIVVY | BASIS

Screen



SUBMATERIAL'S NEW DIVVY COLLECTION OF ELEGANT AND AIRY SCREENS WORK TO DEFINE YOUR PERSONAL SPACE WITHOUT CONFINING IT.

And perhaps most importantly, the sound dampening qualities of the materials used, wool felt and cork, provide acoustic separation. Each screen is fabricated and hand-assembled in our New Mexico studio using modular tiles of dense wool felt or color-tinted cork.

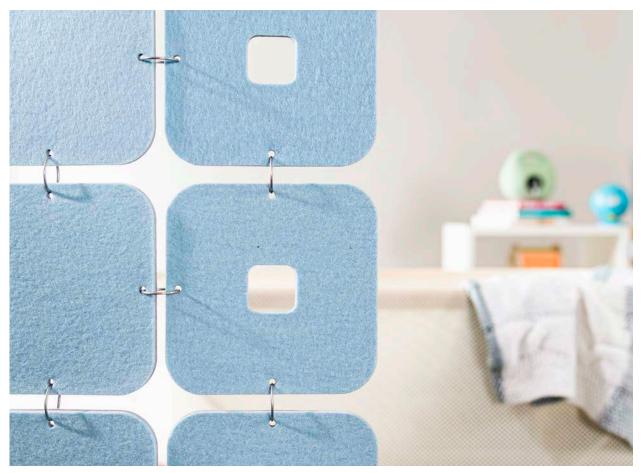

DIVVY | BASIS


Screen

CUSTOMIZE YOUR PRODUCT

Diagrammed below are the materials used to create this Submaterial product. If you would like to make this product one-of-a-kind, select colors from the provided swatches on the following pages using the diagram to assist you in the material assignments. If you believe the customization you seek is outside of the standards listed below, please contact us. Color combinations and configurations to a product may be limited. For more information about limitations be in touch with us at sales@submaterial.com.



MODULE DIMENSIONS

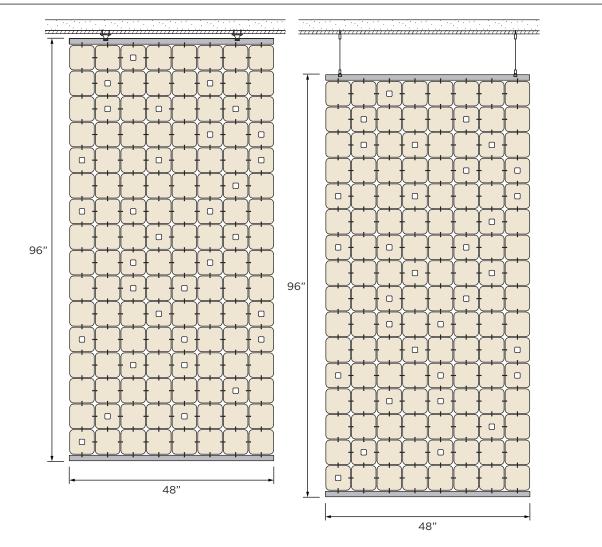

HARDWARE PACKAGE ONE

HARDWARE PACKAGE TWO

DIVVY | BASIS

Screen

FELT

Wool felt is one of the oldest man-made textiles. A biodegradable and renewable material, wool felt is moisture resistant, self-extinguishing, and known for its thermal and acoustic insulation properties. We employ Filzfelt products which are German-milled, 100% wool manufactured. This Merino wool is sourced primarily from Australia, New Zealand, and South Africa. Slight variation in color is a result of the manufacturing with a natural material.



+1 505 891 8356 SALES@SUBMATERIAL.COM

DIVVY | BASIS


Screen



269 VIOLET

DIVVY | BASIS

Screen

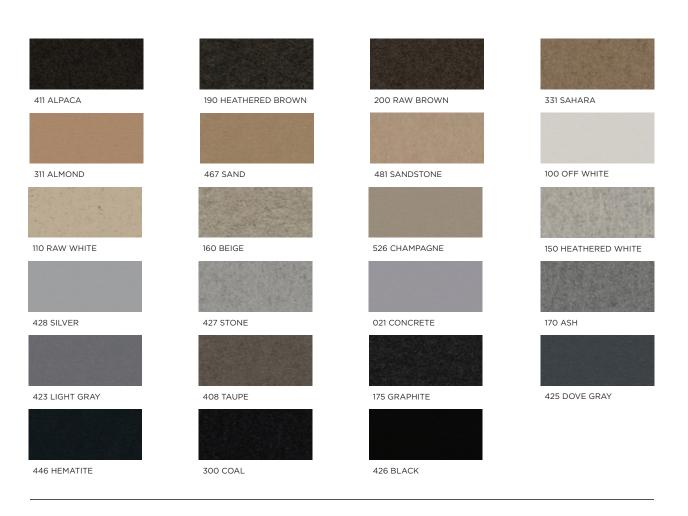

Color combinations and configurations to a product may be limited. For more information about limitations be in touch with sales.

+1 505 891 8356

SALES@SUBMATERIAL.COM

+1 505 891 8356 SALES@SUBMATERIAL.COM

DIVVY | BASIS

Screen

POWDER COATED FINISHES

RAL colors are used to define standard colors across various powder coated surfaces. The most popular manufacturer of powder coats, RAL colors are used in architecture, construction, industry and road safety. Submaterial uses RAL colors for their consistency in color matching. Below is a curated collection of the numerous colors we offer to powder coat any product using a powder coated surface. Note we cannot guarantee matte or gloss finishes, color matching can be verified using the RAL Colour chart, available online.



STANDARD COLORS (PRICE INCLUDED)







RAL 7047 TELEGRAY 4

RAL 38/30019 SLATE GRAY

RAL 7015 DARK GRAY

SUBMATERIAL CURATED COLORS (ADDITIONAL COST)



Color combinations and configurations to a product may be limited. For more information about limitations be in touch with sales.

+1 505 891 8356 SALES@SUBMATERIAL.COM

DIVVY | BASIS

Screen

CORK AS FACE MATERIAL

A completely natural raw material with unique properties which give it an unrivaled character. It is light, impermeable to liquids and gases, elastic and compressible, provides thermal and acoustic insulation, and is fire retardant. Furthermore, it is completely biodegradable, renewable, and recyclable. We source our cork from Corticeira Amorim, the world's largest cork processing group which has innovated and perfected the processing of this material.

AMORIM



8266 RED





8276 BLACK



Color combinations and configurations to a product may be limited. For more information about limitations be in touch with sales.

SPECIFICATIONS

DESIGNER	Submaterial
PRODUCT NAME	Divvy Basis
PRODUCT NUMBER	SCRN-SUBM-0001-08
FAMILY NAME	Divvy
PRODUCT CATEGORY	Screen
MATERIALS	100% Merino Wool Felt, Archival + Acid Free 2-Ply Museum Board, Water Based, Low VOC Adhesive, Anodized Aluminum Hardware, Powder Coated Aluminum, Sustainably Sourced Cork
STANDARD DIMENSIONS	48" x 96"
ITEM WEIGHT	26.0 lbs
COLOR OPTIONS	Filzfelt 100% Merino Wool Felt Swatch List, RAL Color Powder Coat Swatch List, Amorim Cork Swatch List
COLOR SPECIFICATION	To custom order a product, choose respective color assignments per product specification
INSTALLATION METHOD	Ceiling Mounted Hardware (Hardware Package One or Hardware Package Two)
INSTALLED DEPTH	-]"
PURPOSE	Commercial or Residential Use, Interior Use Only
MAINTENANCE	The preferred steps taken for the cleaning process should consist of (in order of intensity): dusting with a lint roller, vacuuming with a clean soft brush, spot cleaning with water and mild detergent, using chemical stain removers. Periodic spot removal of lint can be achieved easily by using a standard tape lint roller. Once per year, it is recommended that the entire surface be given a light vacuum with a soft upholstery brush. Light dusting with a gentle cloth, on hard surfaces, is recommended. Most hard surfaces can take a light application of a natural, neutral-based cleaner, wiped away with a soft cloth.
LEAD TIME	Products on hand will ship out 2-3 business days and will use client's preferred method of shipping. If no preferred method of shipping is mentioned, ground shipping will be chosen. For custom orders, be in touch with sales for accurate lead times. Lead times depend upon material sourcing.
SUSTAINABILITY	100% Wool Design Felt is 100% biodegradable and Akustika 10 Substrate is 100% recyclable Contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances 100% Wool Design Felt contributes to ©LEED certifications. All cork used is sustainably and efficiently sourced from Portugal, 100% VOC free, with no chemical irritants, and free of harmful substances.
CUSTOM	For custom inquiries affecting colorways, sizes and quantities in the set contact Sales@submaterial.com
VARIATION	All products are handmade at our New Mexico studio. Natural variations within the color and material composition are evidence of the handmade and 100% natural origin of the materials. Product colors are only indicative, as it is not possible to assure consistency of color in a natural product due to the natural color of natural materials and absorption of dyes, finishes, and grain. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.
COLORFASTNESS TO LIGHT	Felt, Class 4-5 (40hours)
COLORFASTNESS TO CROCKING	Felt, Class 3-4 (wet), Class 4-5 (dry)
WARRANTY + RETURNS	No warranties are offered on any Submaterial products. Most of our products are made to order, therefore we offer returns or exchanges due to manufacturer's defect only. Items must be returned in the original packaging and have no visible signs of wear or use. If you have a concern, please contact us within 3 business days of receipt of your products. Please retain the original packaging and wait for instructions from our sales team.