
DIVVY | STENO

Screen




DIVVY | STENO

Screen

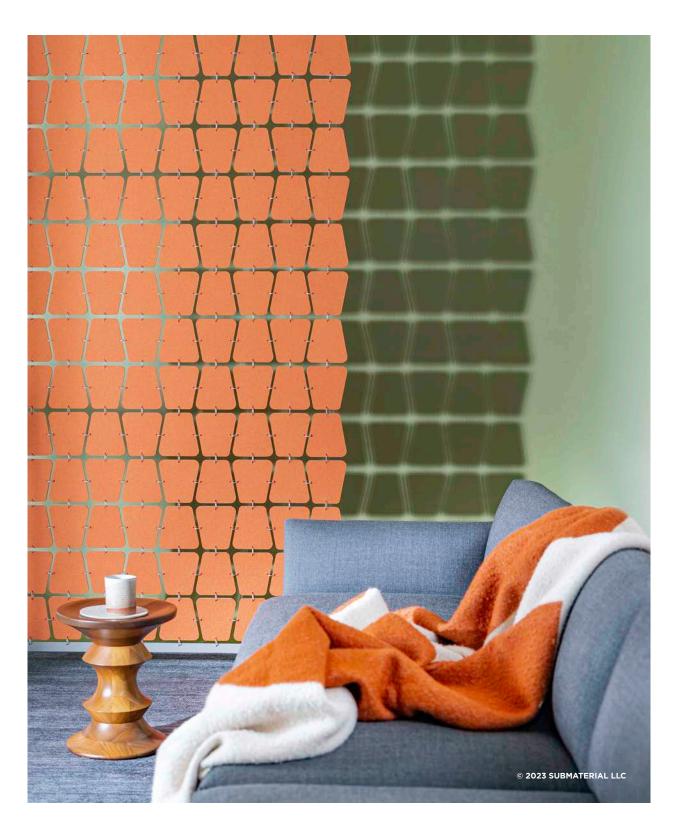

SUBMATERIAL'S NEW DIVVY COLLECTION OF ELEGANT AND AIRY SCREENS WORK TO DEFINE YOUR PERSONAL SPACE WITHOUT CONFINING IT.

And perhaps most importantly, the sound dampening qualities of the materials used, wool felt and cork, provide acoustic separation. Each screen is fabricated and hand-assembled in our New Mexico studio using modular tiles of dense wool felt or color-tinted cork.

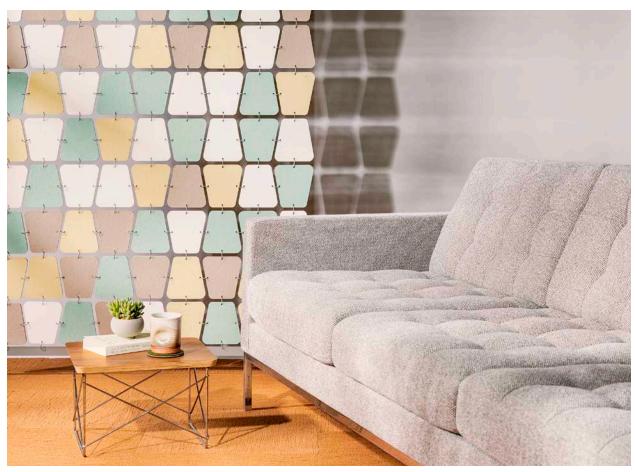

21 June 2023 **2 0F 9**

DIVVY | STENO


Screen

CUSTOMIZE YOUR PRODUCT

Diagrammed below are the materials used to create this Submaterial product. If you would like to make this product one-of-a-kind, select colors from the provided swatches on the following pages using the diagram to assist you in the material assignments. If you believe the customization you seek is outside of the standards listed below, please contact us. Color combinations and configurations to a product may be limited. For more information about limitations be in touch with us at sales@submaterial.com.



MODULE DIMENSIONS

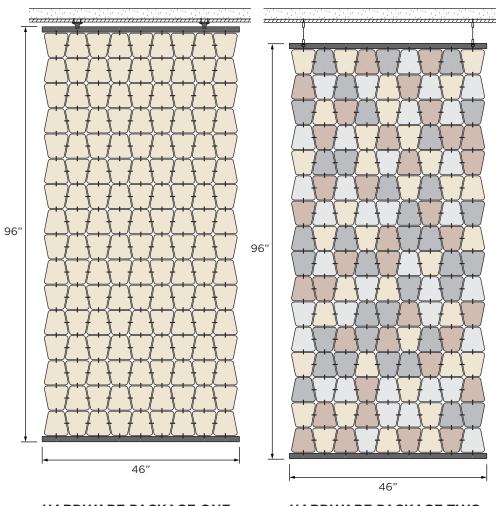

HARDWARE PACKAGE ONE

HARDWARE PACKAGE TWO

21 June 2023 3 **0F 9**

DIVVY | STENO

Screen

FELT

Wool felt is one of the oldest man-made textiles. A biodegradable and renewable material, wool felt is moisture resistant, self-extinguishing, and known for its thermal and acoustic insulation properties. We employ Filzfelt products which are German-milled, 100% wool manufactured. This Merino wool is sourced primarily from Australia, New Zealand, and South Africa. Slight variation in color is a result of the manufacturing with a natural material.

filzfelt •



21 June 2023 4 **0F 9**

DIVVY | STENO


Screer



21 June 2023 5 **0F 9**

DIVVY | STENO

Screen

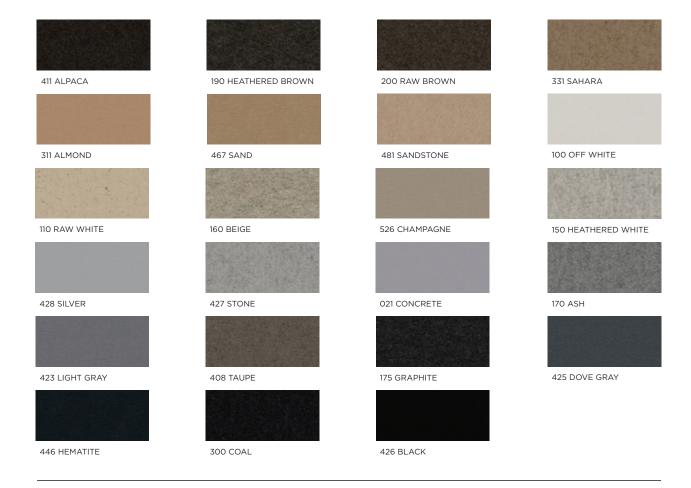

Color combinations and configurations to a product may be limited. For more information about limitations be in touch with sales.

21 June 2023 6 **6 0F 9**



DIVVY | STENO

Screen

CORK AS FACE MATERIAL

A completely natural raw material with unique properties which give it an unrivaled character. It is light, impermeable to liquids and gases, elastic and compressible, provides thermal and acoustic insulation, and is fire retardant. Furthermore, it is completely biodegradable, renewable, and recyclable. We source our cork from Corticeira Amorim, the world's largest cork processing group which has innovated and perfected the processing of this material.

AMORIM







8246 GREEN *additional cos





8226 BLUE *additional cost

Color combinations and configurations to a product may be limited. For more information about limitations be in touch with sales.

21 June 2023 **7 0F 9**



DIVVY | STENO

Screen

POWDER COATED FINISHES

RAL colors are used to define standard colors across various powder coated surfaces. The most popular manufacturer of powder coats, RAL colors are used in architecture, construction, industry and road safety. Submaterial uses RAL colors for their consistency in color matching. Below is a curated collection of the numerous colors we offer to powder coat any product using a powder coated surface. Note we cannot guarantee matte or gloss finishes, color matching can be verified using the RAL Colour chart, available online.



STANDARD COLORS (PRICE INCLUDED)



SUBMATERIAL CURATED COLORS (ADDITIONAL COST)



Color combinations and configurations to a product may be limited. For more information about limitations be in touch with sales.

21 June 2023 8 **9F 9**



SPECIFICATIONS

| DESIGNER | Submaterial |
|---------------------------|--|
| PRODUCT NAME | Divvy Steno |
| PRODUCT NUMBER | SCRN-SUBM-0005-08 |
| FAMILY NAME | Divvy |
| PRODUCT CATEGORY | Screen |
| MATERIALS | 100% Merino Wool Felt, Archival + Acid Free 2-Ply Museum Board, Water Based, Low VOC Adhesive, Anodized Aluminum Hardware, Powder Coated Aluminum, Sustainably Sourced Cork |
| STANDARD DIMENSIONS | 48" x 96" |
| ITEM WEIGHT | 26.0 lbs |
| COLOR OPTIONS | Filzfelt 100% Merino Wool Felt Swatch List, RAL Color Powder Coat Swatch List, Amorim Cork Swatch List |
| COLOR SPECIFICATION | To custom order a product, choose respective color assignments per product specification. |
| INSTALLATION METHOD | Ceiling Mounted Hardware (Hardware Package One or Hardware Package Two) |
| INSTALLED DEPTH | -1" |
| PURPOSE | Commercial or Residential Use, Interior Use Only |
| MAINTENANCE | The preferred steps taken for the cleaning process should consist of (in order of intensity): dusting with a lint roller, vacuuming with a clean soft brush, spot cleaning with water and mild detergent, using chemical stain removers. Periodic spot removal of lint can be achieved easily by using a standard tape lint roller. Once per year, it is recommended that the entire surface be given a light vacuum with a soft upholstery brush. Light dusting with a gentle cloth, on hard surfaces, is recommended. Most hard surfaces can take a light application of a natural, neutral-based cleaner, wiped away with a soft cloth. |
| LEAD TIME | Products on hand will ship out 2-3 business days and will use client's preferred method of shipping. If no preferred method of shipping is mentioned, ground shipping will be chosen. For custom orders, be in touch with sales for accurate lead times. Lead times depend upon material sourcing. |
| SUSTAINABILITY | 100% Wool Design Felt is 100% biodegradable and Akustika 10 Substrate is 100% recyclable Contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances 100% Wool Design Felt contributes to ©LEED certifications. All cork used is sustainably and efficiently sourced from Portugal, 100% VOC free, with no chemical irritants, and free of harmful substances. |
| сиѕтом | For custom inquiries affecting colorways, sizes and quantities in the set contact Sales@submaterial.com. |
| VARIATION | All products are handmade at our New Mexico studio. Natural variations within the color and material composition are evidence of the handmade and 100% natural origin of the materials. Product colors are only indicative, as it is not possible to assure consistency of color in a natural product due to the natural color of natural materials and absorption of dyes, finishes, and grain. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range. |
| COLORFASTNESS TO LIGHT | Felt, Class 4-5 (40hours) |
| COLORFASTNESS TO CROCKING | Felt, Class 3-4 (wet), Class 4-5 (dry) |
| WARRANTY + RETURNS | No warranties are offered on any Submaterial products. Most of our products are made to order, therefore we offer returns or exchanges due to manufacturer's defect only. Items must be returned in the original packaging and have no visible signs of wear or use. If you have a concern, please contact us within 3 business days of receipt of your products. Please retain the original packaging and wait for instructions from our sales team. |

21 June 2023 9 **9 F 9**