


CENTURY

Screen

INSTALLATION INSTRUCTIONS

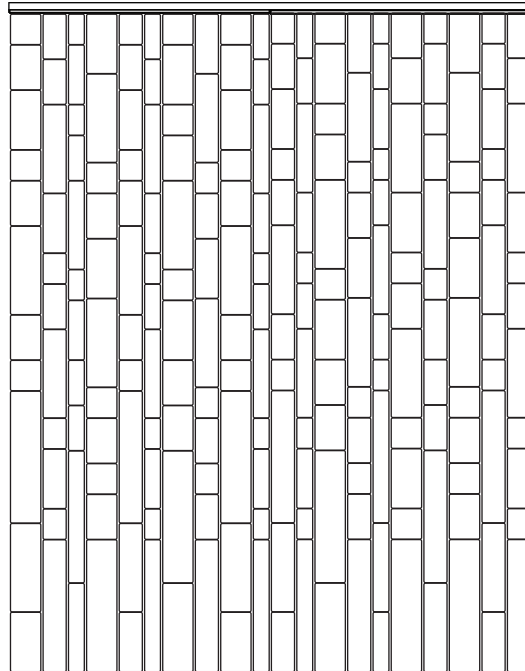

DESIGNER	Submaterial
PRODUCT NAME	Century Screen
PRODUCT NUMBER	SCRN-SUMB-0008-04
PRODUCT CATEGORY	Screen
MATERIALS	Wood Veneer, Cork, Aluminum
INSTALLATION METHOD	Ceiling Mounted Hardware
PURPOSE	Interior Use Only

WARRANTY AND RETURNS No warranties are offered on any submaterial products. Most of our products are made to order, therefore we offer returns or exchanges due to manufacturer defect only. Items must be returned in the original packaging and have no visible signs of wear or use. If you have a concern, please contact us within 3 business days of receipt of your products. Please retain the original packaging and wait for instructions from our sales team.

CLEANING

Lightly dust with a cloth made from gently fibers. Use distilled water and mild soap with a soft cloth to wipe away any residue or substance. Be sure to dry with dry cloth after using wet method.

CENTURY

Screen

INSTALLATION INSTRUCTIONS

It is highly recommended two people work together for this installation procedure. Using very clean hands, handle the screen by the top bar only. Never grab the screen by the middle or by any individual component.


RECOMENDED TOOLS

Power Drill
1/8" Drill Bit
3/8" Drill Bit
Phillips Head Driver Bit


Removable Painters tape
Phillips Head Screw Driver

INCLUDED COMPONENTS


Mounting Strip Ceiling Mount Screw Caps Toggle Bolts

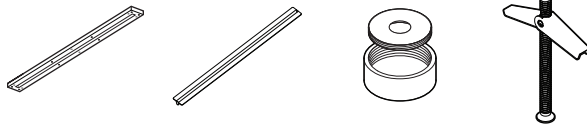


#8 Machine
Screws

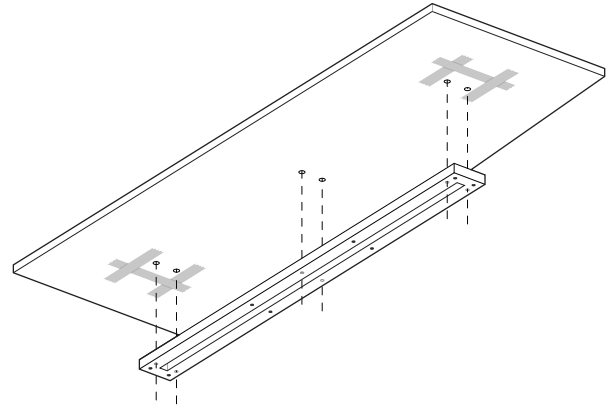

1. Determine your desired hanging location and mark corners as reference with removable painters' tape and a pencil.
2. Raise mounting strip to ceiling and scribe pilot holes onto ceiling where toggle bolts will be placed (pre-drilled holes marked with yellow paint).
3. Using a power drill and a 3/8" drill bit, drill holes in ceiling at locations marked in step 2.

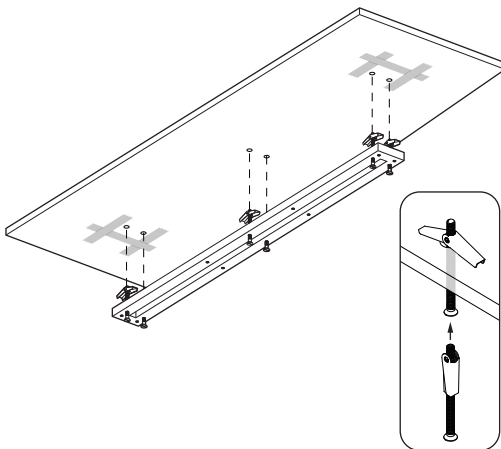

4. Configure toggle bolt and mounting strip according to diagram above and repeat for each mounting point.
5. Raise mounting strip to ceiling and push toggle bolts through pilot holes. Use a Phillips head driver to tighten toggle bolts so that screwhead is countersunk in mounting strip and mount is secure. (If installing more than two screens in a run, repeat steps 1-5 for all mounting strips before continuing).

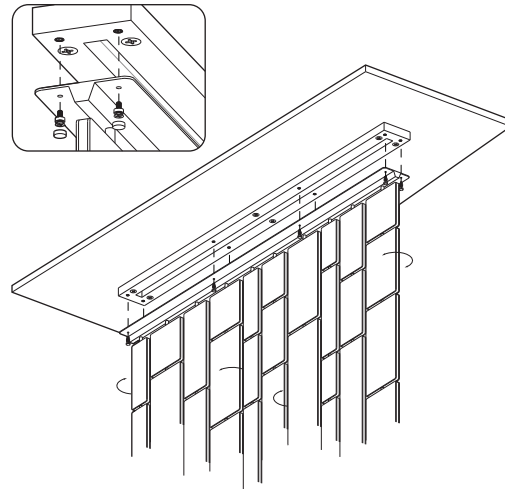

6. Raise ceiling mount to mounting strip on ceiling and align holes on ceiling mount to the threaded holes on mounting strip. Secure using screw and threaded washer assembly and tighten so that screwhead is countersunk into washer.
7. Install screw caps to threaded washers. Repeat steps for any additional screens in run.
8. Remove painter's tape from ceiling and adjust pieces of screen to manipulate transparency and pattern.